PERGO®

WOOD PARQUET

www.excelfloor.com



Stay Clean

introducing a new level of durability to wood flooring 4

*FRONT PAGE FAWN OAK, PLANK W1708-03998-2

Svalbard

LONG & WIDE PLANKS

for a spectacular look





Naturally classy

Looking for design tips and inspiration? ${
m I2}$

the many faces of WOOO



Floors for the environment.
Read about our sustainable production.

31


Do it yourself?

Installing a new floor is easier

Installling a new floor is easier than you might think. We'll guide you every step of the way!



durability 4 | environment 10 | inspiration 12 | installation 31 | choosing a wood floor 32 decors 35 | accessories 44 | matching matrix & technical guide 50

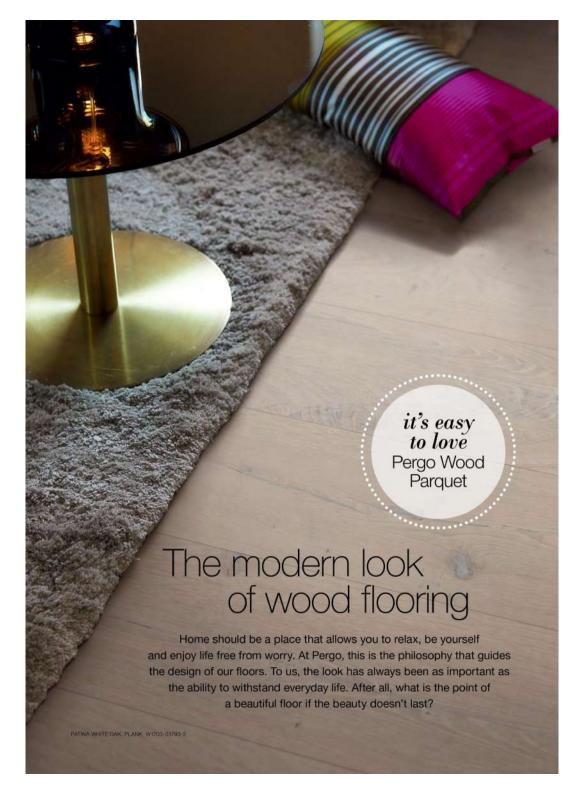



The secret to Pergo durability

Making wood floors allows us to work with a material that is made beautiful by nature. However, wood floors can also be sensitive to discolouring from dirt and moisture. That is why we are proud to introduce the Stay Clean protection.

for lacquered wood flooring!

Other, untreated, wood floors can be penetrated by dirt and water, causing permanent discolouring. Pergo wood floors have protection that covers the entire facing of each plank. And with Stay Clean, all lacquered Pergo wood floors are extra resistant to liquids and spills, preventing dirt from getting into the joints and wood texture.





The all-new Pergo wood floors come in the long plank format, in one impressively long version.

A long plank helps make your room look more spacious and lends a stylish, contemporary feel to the whole interior.

And now Pergo goes wider and longer than ever before. Our longest planks are 220 cm long

and 22 cm wide – a view that, quite simply, has to be experienced.

Despite the long planks, our new wood floors are as easy as ever to install. Thanks to the Perfect-Fold™ 3.0 click system, planks can be installed by a single person. Visit your nearest dealer to feel your way to your favourite!



Get to know wood

Wood is a material that offers natural variety in the way it looks and feels. On top of that, it's also easy to change and modify by choosing different surface treatments and finishes. So when you look for a wood floor, there are a lot of aspects to consider.

Do you prefer the smooth looking walnut floor or a ragged look with visible knots and cracks? Is a low-maintenance lacquer surface protection for you, or do you prefer an oiled floor that can be refreshed or repaired easily? And what about bevels and different formats? In our collection you'll find floors to suit a wide range of styles and preferences.

Learn more on page 32!














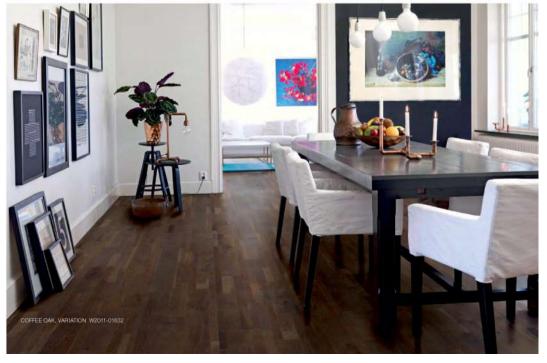



Simple pleasures

Surround yourself with natural materials. Live close to the greenery outside. And let your house fill up with light and laughter.




CHIFFON OAK, PLANK W1708-04000-2







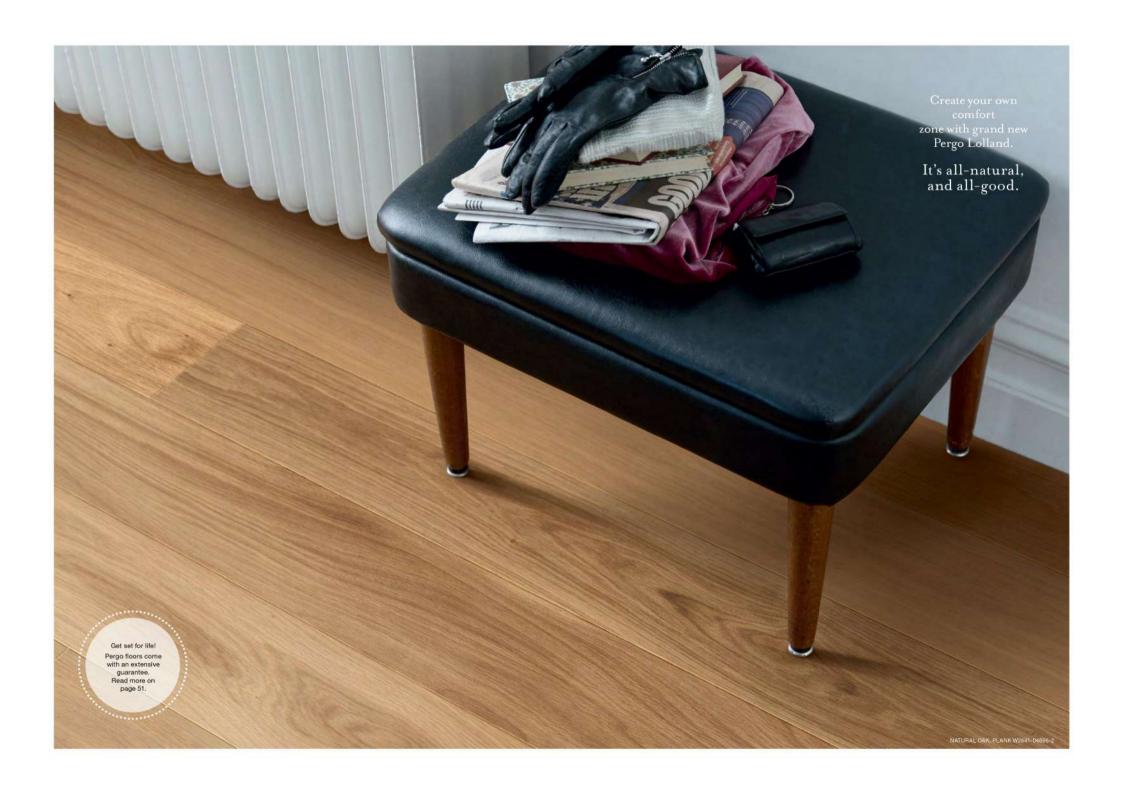





Pergo wood floors are built as they should be: to last. After all, floors need to withstand quite a lot. Children, accidents and parties are all part of life – which is why Pergo floors are designed with them in mind.

Thanks to a robust and innovative construction, every Pergo wooden floor is made to last, and that's why our products come with a lifetime guarantee.

1 Protective finish

Ensuring maximum protection and easy maintenance

2 Face layer

Top notch quality wood selected by Unilin

3 Plywood Core

Multiple layers of wood to guarantee advanced strength and durability


4 Balanced backing

The backing veneer is made from ecologically certified wood and helps to perfectly balance the boards

Uniclic

installation with Uniclic system

Use the method that works best for you!

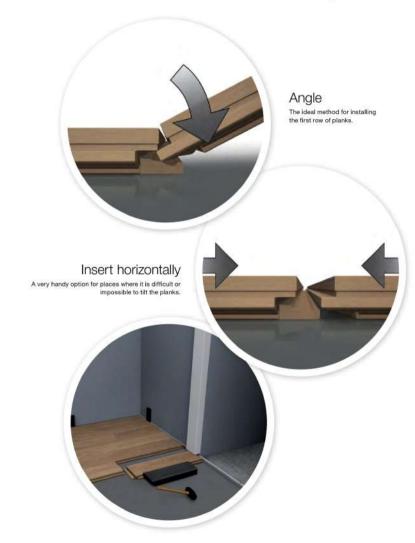

Watch the step-by-step videos on pergo.com

29



Pergo wood floors are built as they should be: to last. After all, floors need to withstand quite a lot. Children, accidents and parties are all part of life – which is why Pergo floors are designed with them in mind.

1 Protective finish

7 layers of high quality lacquer or 2 layers of high quality oil provide maximum protection and ensure easy maintenance

2 Face layer

A carefully selected wood layer, that can be sanded 2 - 3 times

3 Advanced core

The core absorbs the stresses and strains that are put on your floor, and ensures that it remains stable in all conditions

4 Balanced backing

The backing veneer is made from ecologically certified wood and helps to perfectly balance the boards


Pergo wood floors consist of 3 layers of wood with the grain running in different directions to reduce the natural swelling and shrinking caused by fluctuations in temperature and humidity. An advanced core of spruce absorbs stress and strain to ensure that your floor remains stable in all conditions.



Fast & easy

installation with PerfectFold™ 3.0 system

Use the method that works best for you!

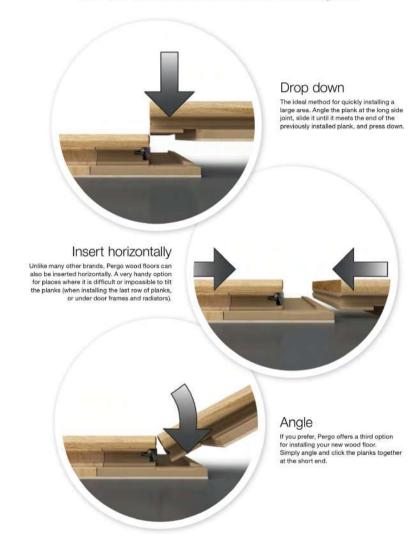

Watch the step-by-step videos on pergo.com

30

Choosing a wood floor

When you go looking for a wood floor you're faced with a lot of choices. Because wood is not only a material that offers a wide variety of natural looks, the variety is increased even more by different surface treatments and finishes. In this brochure you will find a wide range of wood designs. Take your time choosing between the different options to find the floor that is right for you. And when you're ready we advice you to visit your nearest dealer to experience your choice first-hand. Because the tactile beauty of a wood floor makes for a great look, but an even greater touch.

Grading

Each tree is unique, and even different parts of the same tree produce different appearances.

Knots and grain patterns help define and add character. Some of our products have more character than others, and that is why we have developed a grading system to help you find the floor with the expression you want.

Please see pergo.com for more detailed information.



Selected

Wood with knots up to 20 mm;
natural variation in colour and
structure.



Accent
Wood with knots up to
50 mm; lively variation in
colour and structure.



Lively
Wood with big knots up to
80 mm and cracks; lively
variation in colour and structure
and a rather rustic appearance.

Structure



Brushed
Brushing the surface of a wood plank accentuates the natural grain structure, and enhances the authentic look and feel of the wood.



Deep brushed
The wood surface is treat

The wood surface is treated with special brushes, brushing down the soft parts of the wood. Deep brushing enhances the natural wood feel even more.

Finish

Wood is a material that truly grows more beautiful with time. And to ensure that you may enjoy your floors for many years to come, our floors are given a protective and caring surface finish. All our floors are ready for use right out of the box, with no extra surface treatment necessary. Choose between two finishes – oil and lacquer – bringing out different qualities in the wood to give them a distinct look. All of our lacquers and oils meet strict international emission norms, so you can enjoy your wood flooring knowing that it was made with respect for the environment.



Extra matt lacquer

Our extra matt lacquer offers the best of
both worlds: the look of untreated wood

with the performance and low-maintenance



Lacquer makes the floor dirt-repellent, easy to clean, and resistant against water as well as household chemicals. Our lacquer comes in different gloss levels bright, satin and matt lacquer.



High-quality oil
Oil really puts emphasis on the authenticity
of real wood and gives
it an extra matt look that ages gracefully
and is easy to repair and renew.

Bevels

of lacquer.

Bevels define each individual plank, creating the feeling of an authentic wood floor. Our collection features designs with bevels on the longest sides or on all four sides of the plank.

Lacquer



2-way bevel



4-way bevel

Woodspecies

Oak planks have a typical grain structure and a yellow to brown colour. Iroko planks have a golden colour, with brown straight grain.

Merbau varies widely from prange towards dark reddish brown. Walnut has a warm brown colour which contrasts with the whitish sapwood.



Svalbard

2200 x 220 x 14 mm | 4 way bevel







Gotland

1820 x 190 x 14 mm | 2 way bevel / 4 way bevel





GRADINGS: Selected, Accent, Lively



























Bornholm

1820 x 145 x 14 mm | 2 way bevel











GRADINGS: Selected, Accent, Lively













Saltholm

580 x 145 x 14 mm | 4 way bevel











Lolland

1820 x 145 x 13 mm | 4 way bevel









Selected, Accent, Lively













Värmdö

2200 x 190 x 14 mm















Jomfruland

2200 x 190 x 14 mm



















There are some things you might not think of as important parts of a beautiful floor.

For the best-looking result, we recommend that you take the time to include accessories when you go floor shopping.



Wallbases

Pergo's wallbases are installed easily and flexibly using a snap-in system, nails, screws or glue. All wallbases have milled grooves on the back for easily concealing cables.



T-Mouldings are necessary for allowing floors to move when installing separate flooring sections on the same level, e.g. in two connecting rooms with the same floor. Available in our 5-in-1 solution.



Transitions and finishing pieces

These accessories provide an elegant transition and compensate for height differences wherever wood floors meet other flooring surfaces. Use a Carpet transition between wood and carpeting, and a Hard surface reducer between wood and tiles. End mouldings provide a nice finish against thresholds and in other similar situations. Available in our 5-in-1 solution.

Stair noses

Pergo's flooring is an excellent choice even for staircases, where matching stair noses are used to provide an elegant finish to each individual step. Available in our 5-in-1 solution.







(see matching matrix for correct art no)

5 perfect finishes in 1

Pergo 5-in-1 offers different moulding solutions for different parts of your floor, all wrapped up in one handy package. The mouldings match your floor perfectly in colour, as well as in texture, and the one-piece solutions give a seamless installation result. The surface is made of wear and scratch-resistant veneer. The core consists of HDF and the bottom rail is made of plastic. With the patented Incizo® solution, you easily cut the moulding to the shape you need. Knife is included. Suitable for flooring heights between 12.5 and 14 mm.



T-moulding From wood to wood.



Carpet transition From wood to carpet



Hard surface reducer From wood to ceramic, vinyl or linoleum.





End moulding Finishing up to threshold, sliding doors, etc.



Stair nose moulding, flush For a flush finish on stair treads.



Stair nose moulding For a step down from a floating floor, e.g. at the top of the stairs or a step down in a room,

The Incizo® subprofile is required for stair application and has to be ordered separately.

NEWINCPBASE3ME215, for 14 mm floors NEWINCPBASE2ME215, for 12.5 mm floors





Stair nose, aluminium PGSTPSILVME270N, 2700 x 23 mm

Fits to flooring thickness of 7 - 16 mm. Surface: aluminium.





Wallbase, straight PGWPPSKR(-), 2400 x 16 x 80 mm (see matching matrix for correct art no)

Surface: wear and scratch-resistant veneer, Core: MDF. Colour matched,



Wallbase, white & paintable PGWPPSKRWHITE, 2400 x 16 x 80 mm - white PGWPPSKRPAINT, 2400 x 16 x 80 mm - paintable

Surface: foil. Core: MDF. Colour: white (NCS 0502 Y), paintable.



PGSCOTWHITE, 2400 x 17 x 17 mm - white PGSCOTPAINT, 2400 x 17 x 17 mm - paintable

Colour: white, paintable Surface: foil Core: MDF

underlays



Underlays for wood subfloors

Durability Walking sound reduction Floor heating** Vapour barrier Thickness



GOOD

Underlay Foam

Underlay Foam PGUDLFOAM15B

For rooms with light traffic. 15 m² / roll



Smart Underlay POUDI SMART15

For rooms with frequent traffic 15 m2 / pack.



Silent Walk PGUDI SW7

A very durable and strong underlay for rooms with more frequent traffic 7 m2 / roll

Underlays for concrete subfloors

GOOD

Underlay Foam+


.....

Durability Walking sound reduction Floor heating** Vapour barrier Thickness



Underlay Foam+ PGUDLFOAMPLUS15

A good basis for rooms with less traffic. Integrated vapour barrier with an overlap and tape strip included. 15 m² / roll.



Smart Underlay+ PGUDLSMARTPLUS15

Good in rooms with more frequent traffic. Integrated vapour barrier an overlap and tape strip included. 15 m² / pack.



A very durable and strong underlay for rooms with more frequent traffic. 7 m² / roll

"When installing the SilentWalk on concrete floors or atop floorheating, tape the edges of the underlay with a damp-proof tape. Don't do this when installing on wooden subfloors, ""Always use together with PE film

Underlays for professional use



Professional SoundBloc™

PGUDLPS15, 0.95 x 15,79 m = 15 m²/roll PGUDI PS50, 0.95 x 52 64 m = 50 m³ / roll

The best underlay for eliminating reflected walking sound. Increases walking comfort and provides excellent impact sound insulation. Integrated vapour barrier with an overlap and tape strip included. Thickness: 2 mm. Material: Crosslinked polyethelene foam.

Getting cold feet?

There's no need. With Pergo Quickheat, installing underfloor heating is easy.



Pergo Quickheat is the smart and easy way to enjoy underfloor heating. Nothing to cast in concrete, minimum bother - you can even forget about the electrician. Just roll out the Quickheat mats with built-in heating cables and click them together. Install the thermostat and safety box on the wall and plug in.

In addition to warmth, Pergo Quickheat also provides walking comfort, so no other underlay is needed. By supplementing your primary heating system with Pergo Quickheat, you can also usually lower the temperature 2 - 3 degrees compared to using radiators. The timer included with the system can be set for 5 + 2 days.

1. Quick, comfortable warmth


Pergo Quickheat consists of two layers of foam plus a middle layer with heating cables and a reflective surface of aluminium foil. Thanks to the insulation and the heat-reflective surface in the bottom of the mat, all heat is directed upward for fast adjustment of the room's temperature.

2. Built-in safety feature

Pergo Quickheat has a built-in electrical safety feature that automatically disconnects power if a failure should occur. Naturally, the system is certified for do-it-yourself installation and fulfils international standards for removable floors.

3. Wireless thermostat in every room

With Pergo Quickheat you can easily fine-tune the temperature of each room. Once the mats have been rolled out, simply connect the safety box and set the wireless thermostat to the desired temperature. The flexible timer allows you to have separate floor heating settings for weekdays and weekends. Four individual time zones support your daily mode (morning, day, evening and night) and each period can be set with a unique temperature.



PGUDLQH3, 3 x 1 m PGUDLQH4, 4 x 1 m

55 W / m2, 220 V 50 Hz (European plug). Max load: 10 A (2300 W at 230 V). Maximum installation area: 42 m². Suitable for 5% - 95% relative humidity Thickness: 8 mm. Thermal Insulation: 8 W / m2 K. PGUDLQHFILLERMAT, 6.37 m²

26 mats/box. Used for the space between the heating mats and the wall

Extension cables PGQHEXTCAB025, 0.25 m PGQHEXTCAB100, 1.0 m PGQHEXTCAB200, 2.0 m

Used between mats and/or to extend between mats and safety box.



Installation kit, wireless **PGUDLQHKITEU**

Wireless thermostat, safety box, connector tool and installation

46 * Pergo Quickheat is not yet available for the Chinese market. 47

maintenance



Moisturbloc Extreme™ PGUDLMOH5

This vapour barrier has three times the moisture resistance of a traditional PE film. Can be installed on concrete floors with up to 95% relative humidity, making it ideal in basements and on concrete floors with high humidity. Moisturbloc Extreme" makes it possible to install floors earlier during the construction of new homes. 105 x 15 m = 15 m" (5 cm overlap).

Tape included. Thickness: 2.5 mm.

Material: Polypropylene.



PE film (polyethylene) PGUDLSCREEN34,

12.5 x 2.7 m = 33.75 m²/roll
An underlay that protects flooring
from moisture vapour rising
up from a mineral or concrete
subfloor. Useful lifetime 50 years.
Thickness: 0.2 mm. Material:
Polyethylene, alkaline resistant.



Installation kit

Everything you need in one box. Contains tapping block, installation spacers in two sizes (2 x 18 = 36 pcs) and a pullbar.

Extra spacers PGSPACER, 48 pcs



Wallbase installation kit

All wallbases are installed with an easy to use snap-in system where no nails or screws are visible. One installation kit is enough for 15 metres of wallbase.



Wood tapping block PGWTAPPINGBLOCK Professional tapping block. 520 x 110 x 62 mm. 10 pc / pack.



Professional pullbar PGWPULLBAR Professional and silent pullbar thanks to the rubber shock absorber on the contact surface. 700 x 280 x 230 mm. 1 pc / pack



Safeseal PGSEAL500 500 ml. Used for floor areas that require extra protection against moisture. PVAc based.



Multiglue PGGLUE290 290 ml. Ideal for installing wallbases and mouldings. Hybrid polymer. One tube gives 15 running meters of skirting.



Sealant PGKIT(-)A 310 ml. For a beautiful finish. Dry in half an hour and fully cured after 24 hours. Available in 8 colours. Water based acrylic.

For a neutral color use Aqua Sealant (PGKITTRANSP)



Radiator caps Stainless steel PGRCINOX15 inner diameter: 15 mm outer diameter: 54 mm PGRCINOX22 mouter diameter: 22 mm outer diameter: 54 mm



Tape
NETAPE50
50 m x 5 cm. Self-adhesive
aluminium tape for underlays.

Our high-quality, ergonomically designed original maintenance accessories make it even easier to keep your floor looking fresh for longer. To maintain the lustre of a Pergo floor, avoid using regular cleaning products such as soaps and detergents as these will form a film on the surface. Pergo's special all round cleaner removes dirt without leaving a film if used correctly.



Cleaning kit

High-quality mop set with extra long ergonomic handle and a mop cloth holder with a practical Velcro fastener for attaching the mop cloth.



All round Floor Cleaner

Specially developed for cleaning wood or laminate flooring, Ideal for removing dirt, grease spots and heel marks, as well as for daily cleaning.



Repair wax

Repair the colour of damaged planks quickly and easily with wax in colours covering the Pergo wood palette. Contains 1 melting knife, 1 comb, 7 wax blocks. For more information on how to mix colours please visit pergo.com

Cleaning and maintenance tips!

In order to maintain the original texture and impression of your wood flooring it's important to clean and maintain it on a regular basis. After installation and before you furnish the room we suggest to clean the surface using vacuum cleaner or a dry mop. If needed you can also clean the surface using a damp micro mop to remove any dirt left after the installation.

- » For the regular cleaning and maintenance, use dry methods as much as possible using our microfiber mop with its large dirt holding capacity.
- » On occasion and based on the usage of the floor a light damp cleaning is required. You can combine the microfiber with the Pergo Allround floor cleaner for the best result. The cleaner is compatible with lacquered and oiled floors. It cleans the floor thoroughly, retains the original look of the floor, keeps the floor hygienic and does not cause layers of product to build up.
- » Our oiled wood floors need regular maintenance to retain its original look and become

- more wear-resistant. Read more on our web page.
- » You should always control the amount of water used since a wooden material has limited resistance against water. A good rule of thumb when using water is to make sure that the surface is completely dry within 60 seconds.
- » Never use steel wool or another course material as this may damage the structure and appearance of the top layer. A Pergo wood floor may not be waxed or polished.
- » The complete cleaning instruction together with our Stain removal guide is available on our web page.

48 49

matching matrix

formats

W1703-03096-2 Hazel Oak, plank
W1703-03790-2 Granule Oak, plank
W1703-03793-2 Patina White Oak, plank

| | Collection | Length, mm | Width, mm | Thickness | Panels/pack | m²/pack | Pack/pallet | m²/pallet |
|--------------|------------|------------|-----------|-----------|-------------|---------|-------------|-----------|
| | Svalbard | 2200 | 220 | 14 | 4 | 1.936 | 64 | 185.874 |
| Plank design | Gotland | 1820 | 190 | 14 | 6 | 2.075 | 55 | 114,114 |
| | Bomholm | 1820 | 145 | 14 | 6 | 1,583 | 66 | 104.504 |
| | Vármdő | 2200 | 190 | 14 | 6: | 2.508 | 55 | 137.94 |
| | Jomfruland | 2200 | 190 | 14 | 6 | 2.508 | 55 | 137.94 |
| | Saltholm | 580 | 145 | 14 | 12 | 1.009 | 99 | 99.91 |
| | Lolland | 1820 | 145 | 13 | 6 | 1.583 | 66 | 104.50 |

Every pack can contain 1 board which is composed of two planks with variable length.



Product images may differ from actual product. The availability of products, or the products themselves, may change at any time without notice.

Contents 2017 by ***** UNILIN** byto - division flooring. All Rights Peserved. The contents of this brochure may not be reproduced in whole or in part without prior written permission from the publisher.



FLOORS FOR REAL LIFE







pergo.com



Distributed by ExcelFloor, Thailand Contact: Mr. Watthanachai Mobile. 063 449 7959
E-mail. INFO@excelfloor.com
Website. www.excelfloor.com

PERGO



Production: Konwalanko, Photo: Johan Kalán, Styling: Patrizia Intiso, Anna Biörki